

BOLLARD L



Product Name: Bollard L

Product Code: BOLLARD-L-67234

Environment: Outdoor

Usage Area: Parking, hospital, moist areas etc.

Category: Street Lighting

Mounting Type: With bolt



- **OSA Lighting Techniques** offers indoor and outdoor lighting applications with different solutions in color and size in local production.

- Easy installation and low maintenance, Bollard L will be your light source for years.

- Heat and impact-protected, sanded decorative glass that provides homogeneous light distribution without glare

BOLLARD L



Housing: Die Cast Aluminum

Light Source: LED

Operating Temperature: -20 to 85

Color: Electrostatic RAL

Distribution: Direct/Indirect

Warranty: 3 years

Diffuser: Glass or Acrylic

Driver: Electronic

Product Type:

- 1

Dimensions (mm):

- Width: 200-800 mm
- Height: 500-3000 mm

Watt (W):

- 10-15



BOLLARD L



Input Volt:

- 180-240V

Degree:

- 15°-30°-45°

Lumen/watt : 125lm/W

- 1120-1690lm

CRI:

- >80CRI

Color Temperature:


- 2700-6500Kl

Service Life:

- 5 Year

IP Protection:

- IP 65

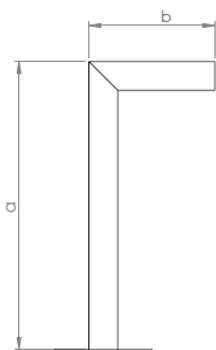

Width(a)	200-800 mm
Height (b)	500-3000 mm